


G-FORCE SUPPLEMENT

To the Ultima II Instruction Manual (place before page 6)

The G-Force Filter is designed for bodies of water up to 3000 gallons.

Important: Must be plugged into a GFCI (Ground Fault Circuit Interrupter)


The G-Force body and motor come assembled. Do not disconnect the motor from the body, it has been tested at the factory for functionality and leaks. Two bags of black Ultima Media are labeled in the box with the G-Force body. This is not packing material. Follow the directions starting on page 6 of the Ultima Manual to add media, seat the valve and plumb.

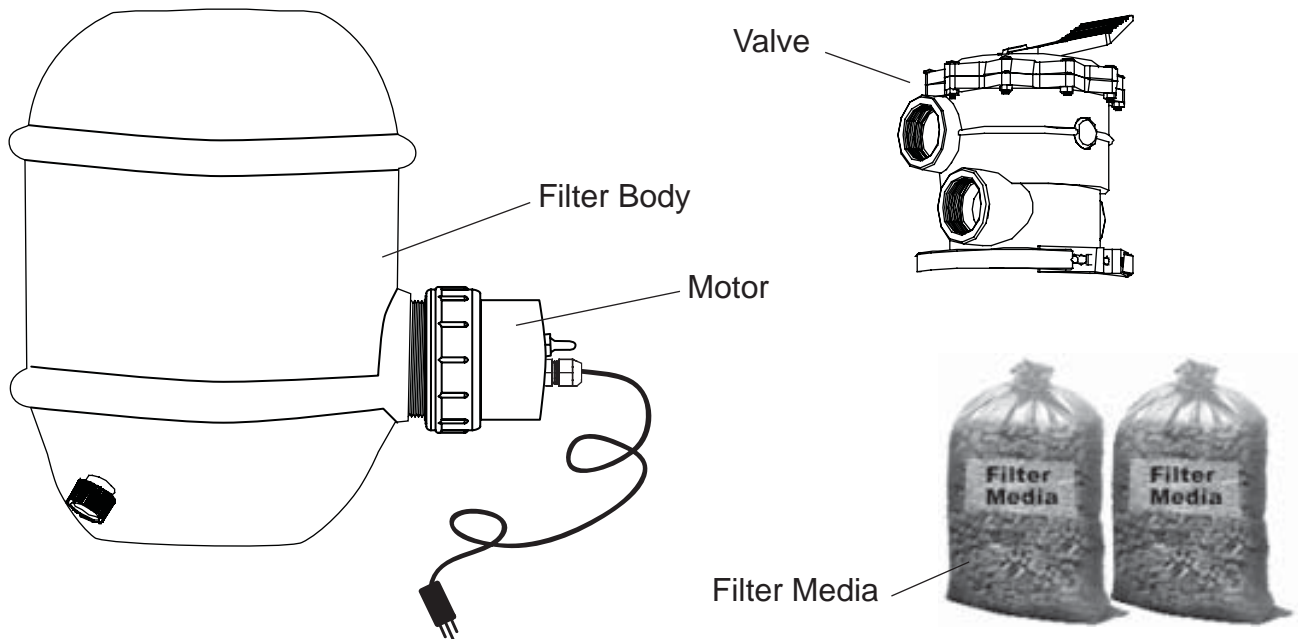

Caution:

If water is leaking from the motor disconnect the power immediately and tighten the motor. Do not attempt to service or remove the motor with the G-Force in the upright position. Remove all water from the filter through the drain plug and lay it on its side, as shown below, before servicing the motor. This is best done by two people, one to hold the filter to prevent rolling and one to unscrew the motor from the body.

Re-install the motor with the body laying, on its side, motor opening facing up. Slip the motor into the body and hand tighten being careful not to cross thread. Snug by tightening an additional quarter turn. Do not use tools to tighten. Return filter to its upright position.

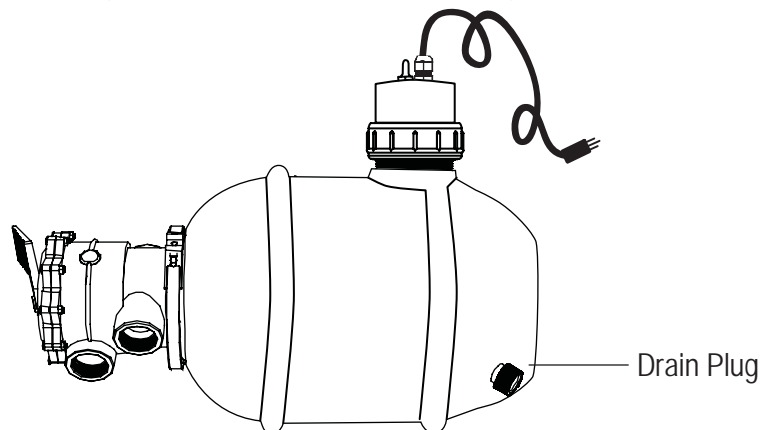

G-Force Backwash Instructions

Important Notes :

Do not operate the motor without water in the filter.

Always Operate the G-Force motor with the Valve handle pointing to the Backwash Setting Only. Do not operate the motor with the valve set in any other position.

Before moving the valve handle always turn off your pump.

(See Page 10 of the Manual for an explanation of the Valve Settings)

Follow these steps to backwash your G-Force Filter :

- Turn off your pump
- Rotate the valve handle to the “Backwash” position
- Press the toggle switch on the G-Force Motor for a count of 10, then release
- Turn on your pump and run it for 30 seconds
- Turn off your pump
- Rotate the valve handle to the “Rinse” setting
- Turn on your pump and run it for 30 seconds
- Turn off your pump
- Return the valve setting to the “Filter” setting where it remains for normal operation
- Turn on your pump
- Backwash is complete

These simple steps are all that is required to backwash the G-Force filter. We recommend one backwash cycle a week for normal fish loads, it may be necessary to repeat this cycle for ponds with heavy fish loads.